

HLE- 3GXV-F


**Ethernet Wireless Router
WiFi6 AX1800
with VoIP**



Product description

HALNy CPE / Home Gateways are innovative and powerful products for business and residential subscribers.

HALNy specializes in cost-effective designs, and works closely with service providers to improve their business case through a comprehensive range of standard products, supporting the industry's common demands. HALNy also provides custom designs and services to meet unique customer needs.

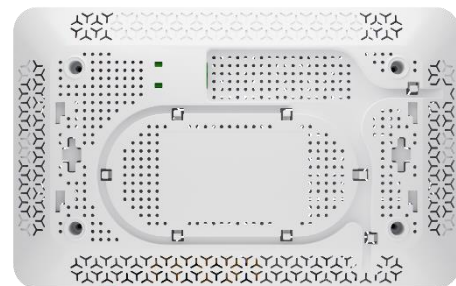

DEVELOPED IN



All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers.

Actual data throughput and WiFi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, result in lower actual data throughput and wireless coverage.

Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.

Hardware Specification

CPU	Dual Core 900Mhz	Storage Temp.	-10~60°C
WAN Port	1 x port 10/100/1000BASE-T (RJ-45) Auto-sensing, auto-detection MDI/ MDI-X	Operating Temp.	0 ~ 45°C
LAN Port	3 x port 10/100/1000BASE-T (RJ-45) Auto-sensing, auto-detection MDI/ MDI-X	Operating Humidity	10~90 % (non-condensing)
WiFi	2T2R AX1800 2.4Ghz and 5Ghz MU-MIMO Antenna type: Internal	Power Voltage	DC power jack, 12V/ 1.5 A
VoIP	1xFXS	Miscellaneous Interfaces	ON/OFF Power Button WPS Reset Button
LED	POWER, Internet, WLAN 2.4, WLAN 5G, WPS, LAN1-3, WAN, TEL	Dimension (W x H x D)	225x46x142

Software Specification

Routing/Bridging	<ul style="list-style-type: none"> • PPPoE Client • 802.1q • DHCP Server/Client/Relay • NAT and PAT • DNS Relay • IGMP Proxy and Snooping • Multiple WLAN SSID • VPN Pass-through • SNMP • Port Forwarding • UPnP • Firewall 	Telephony	<ul style="list-style-type: none"> • SIP • DTMF support • Dial Plan
Management	<ul style="list-style-type: none"> • Two users: admin / useradmin • Dual Image Support 	Provisioning	<ul style="list-style-type: none"> • TR-069 • DHCP 66/67 XML
		EasyMesh	<ul style="list-style-type: none"> • Controller • Agent

All specifications are subject to change without notice. The above product picture is a sample for reference and may vary. Please check with your supplier for exact offers.

Actual data throughput and WiFi coverage will vary from network conditions and environmental factors, including the volume of network traffic, building material and construction, and network overhead, result in lower actual data throughput and wireless coverage.

Quoted network speeds and bandwidth based on current IEEE specifications. Actual performance may be affected by network and service provider factors, interface type, and other conditions.